



Silvery Anodized Aluminum Solar Panel Frame 6063 / 6061 With Finished Machining

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: HENTEC
- Certification: CA ,CE
- Minimum Order Quantity: 1 ton
- Packaging Details: Packed with EP ,Carton ,Pallet or wooden case
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 3000tons each month



Product Specification

- Product Name: Aluminum Solar Panel Frame
- Alloy: 6063,6061,6005
- Material: Aluminum
- Surface Treatment: Mill Finished,Anodized ,Electrophoretic Coated,Powder Spray Coated
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T4, T5, T6
- Highlight: **anodized aluminum frame,
solar panel aluminum frame**

for more products please visit us on aluminumextrusion-profiles.com

Product Description

Silvery Anodized Aluminum Solar Panel Frame , 6063 / 6061 , With Finished Machining

Product Description

material:	aluminum alloy
Designation:	6 or other series by your demand
length	custom available
thickness	custom available
Description	aluminum profile, aluminum extrusion, aluminum tube, bar, aluminum alloy, aluminum products, aluminum doors and windows, building material
Surface Treatment	mill finish(without treatment), polished, anodizing, power coating, sand blasting, electrophoresis etc.
Dimension	optional
Packing	Kraft paper, carton box, protection foam heat contracted plastic film, poly-bag, etc by your demand.
Certificates	ISO 9001.CE, SGS,
Color	Silver , black ,silver, bronze .champagne, wood grain and so on
Shape	Various shapes, parameters and colors available
Usage	industrial etc.,
Delivery Detail	10-20days / depend on quantity and drawings
Quality	Quality complies with international standard.
Design	OEM or ODM is available, pls send us your drawing
Feature	High corrosion-resistance, weather-resistance, heat-resistance, alkali-resistance

-----Ground Solar Mounting System

1. Easy To Install
2. The simple design and pre-assembled components ensure a quick and easy installation
- Unmatched Durability
3. All structure components are comprised of high quality galvanised steel and anodized aluminum alloy, they are designed for a 25 year service life and are backed by 10 year warranty.

-----Roof Solar Mounting System

1. Unmatched Durability---10 year warranty.
2. Easy To Install---The simple design and pre-assembled components ensure a quick and easy installation.
3. All Weather

Solar panels (photovoltaic modules) aluminum frame

A. Solar module aluminum frame Size Description:

- 1) 17 * 17, 20 * 20, 23 * 17, 25 * 25, 28 * 25mm, etc., suitable for solar street lamps and other small solar power generation equipment;
- 2) 30 * 25, 35 * 30mm, suitable for 30-100W solar modules;
- 3) 35 * 35mm, suitable for 80-180W solar modules, length is generally 1580 * 808mm (the most common frame size);
- 4) 40 * 35mm, suitable for 120-200W solar modules, length is generally 1580 * 808mm;
- 5) 45 * 35mm, suitable for 180-250W solar modules, length is generally 1580 * 808 and 1650 * 992mm;
- 6) 50 * 35mm, suitable for 200-300W solar modules, length is generally 1650 * 992 and 1960 * 992mm;
- 7) Many other customized according to customer's special sizes, such as 40 * 28mm, 40 * 30mm, 42 * 35mm, 46 * 30mm, 46 * 35mm, 46 * 40mm, 46 * 48mm, 46 * 50mm, 46 * 60mm, 60 * 35mm and so on.

B. Two types:

- 1) 90 Angle (screw border)
- 2) 45 corner (Corner Borders)

C. Surface treatment:

- 1) Anodized (silver, bronze, black, gold, silver, other colors)
- 2) Electrophoresis
- 3) powder coating, PVDF, polishing, sand blasting

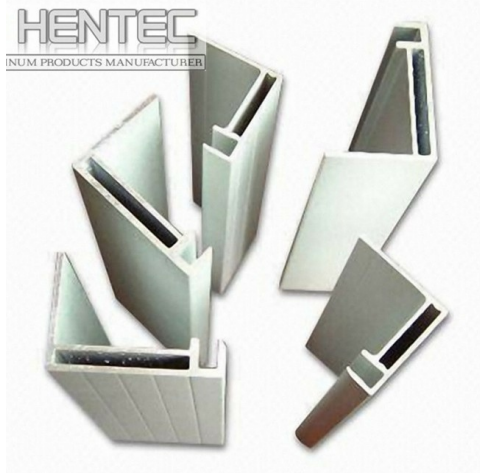
Standard: GB/T5237 - 2004, Q/320281PDW01-2008

Size: According to your design drawings, model

Note: 1. Various sizes for our existing solar frame, without open new mold.

2 aluminum frame is very popular in Europe.

3. We can follow your design drawings requirements.



Our Advantages!













1. 22 years' experiences of manufacturing .
2. STRONG R&D: Help customers finalize the design, strong tool design ability,excellent pressing and surface treatment technology.
- 3.Strict quality management: ISO Administration system.
4. 24 hours on-line communication.Professional, Patient, Flexible.
5. High capacity of manufacturing and wide range of products.
6. Be able to provide secondary fabricating.
7. Small order is accepted.
8. Be able to provide one-stop supply solution.
9. Multiple payment methods: TT, LC, DP,OA.

太阳能系列 Solar energy series **HD太阳能系列型材图**

新图号	简图	线密度 kg/m	新图号	简图	线密度 kg/m
旧图号			旧图号		
GT001		0.987	GT007		0.803
G701			G007		
GT002		0.530	GT008		0.633
角码为GT001			G008		
G702			GT009		0.494
GT003		0.615	G009		
G795			GT010		0.496
GT004		0.466	G010		
G794			GT011		0.388
GT005		0.814	G011		
G590			GT012		0.290
GT006		0.681	G012		
G591					

209 线密度仅供参考，出货以实际称重为准!

HD太阳能系列型材图 国家免检













新图号 旧图号	简图	线密度 kg/m	新图号 旧图号	简图	线密度 kg/m
GT013 G778		0.372	GT019 G599		0.665
GT014 G594		0.367	GT020 G846		0.400
GT015 G595		0.183	GT021 Z081		0.884
GT016 G596		0.248	GT022 Z082		1.228
GT017 G597		0.534	GT023 Z083		0.952
GT018 G598		0.339	GT024 Z084		1.073

线密度仅供参考，出货以实际称重为准！ 210

新图号	旧图号	简图	线密度 kg/m	新图号	旧图号	简图	线密度 kg/m
GT025			0.653	GT031			0.548
角码为GT026	G895			G893			
GT026			0.732	GT032			0.279
G896				G894			
GT027			0.424	GT033			1.711
角码为GT026	G915			G913			
GT028			0.524	GT034			0.745
角码为GT026	G916			角码为GT033	G914		
GT029			1.300	GT035			0.398
G822				G222			
GT030			0.567	GT036			0.754
角码为GT029	G823			G224			

211 线密度仅供参考，出货以实际磅重为准！

HD太阳能系列型材图 国家免检

新图号 旧图号	简图	线密度 kg/m	新图号 旧图号	简图	线密度 kg/m
GT037 G229		0.172	GT052		0.728
GT038 G230		0.374	GT054 角码为GT052		0.509
GT039 G889		0.626	GT055 角码为GT052		0.537
GT040 G888		0.756	GT061		0.161
GT041 角码为GT026 G187		0.692	GT062		0.340
GT042 角码为GT026 G789		0.443	GT063		0.209

线密度仅供参考，出货以实际磅重为准！ 212

新图号 旧图号	简图	线密度 kg/m	新图号 旧图号	简图	线密度 kg/m
GT064		0.394	GT076		0.698
GT068		0.497	GT077A		0.848
GT069		0.613	GT078A		0.635
GT070		0.312	GT079		0.524
GT071		0.687	GT080		0.651
GT072		0.378	GT081		0.395

213 线密度仅供参考，出货以实际磅重为准！

HD太阳能系列型材图 国家免检

新图号 旧图号	简图	线密度 kg/m	新图号 旧图号	简图	线密度 kg/m
GT082		0.245	GT088		0.677
GT083		0.267	GT089		0.558
GT084		0.519	GT091		0.580
GT085		0.646	G791		
GT086		0.674	GT092		0.967
GT087		0.655	G792		
			GT093		0.832
			GT094		1.519

线密度仅供参考，出货以实际磅重为准！ 214

Applications:

- 1) Living house and home building.
- 2) Commercial building, factory, shopping mall, school, stadium etc.
- 3) Power station, field operation and some huge engineer construction.

Competitive Advantage:

In addition to high quality ,we at Hentec office offer customer complete service .Our aluminum solar frame comes with a 15 year warranty .Maintenance service is also available .



 **HENTEC** Hentec Industry Co.,Ltd

 +86-13861643436

 aluminum@hentec.com.cn

 aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421