

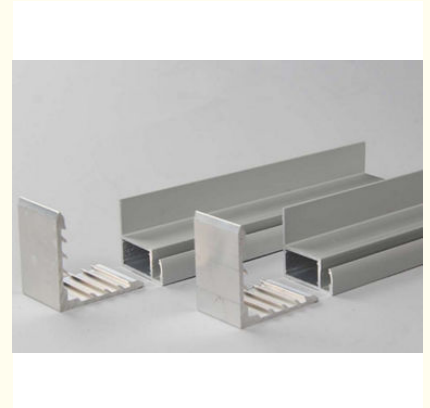


Silvery Anodized Solar Panel Aluminium Frame 6063 / 6061 With Cutting / Punching

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: HENTEC
- Certification: CA ,CE
- Minimum Order Quantity: 1 ton
- Packaging Details: Packed with EP ,Carton ,Pallet or wooden case
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 3000tons each month



Product Specification

- Product Name: Solar Panel Frame
- Alloy: 6063,6061
- Material: Aluminum
- Surface Treatment: Mill Finished,Anodized
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T5, T6
- Highlight: **aluminium solar panel frame, anodized aluminum frame**



Product Description

Silvery Anodized Solar Panel Aluminium Frame 6063 / 6061 With Cutting / Punching

We can provide high quality aluminum extrusion profiles which can be used in almost industry line.

1. Aluminum extrusion profile
2. Aluminum alloy: 6000 series , T4-T6 temper.
3. All kinds of surface treatment, such as powder coated, electrophoresis, anodizing finish of all colors.
4. Anodized thickness : more than 10 and 13 microns
5. Guaranteed quality and good price.
6. Good surface finished, no burr or dirt.

Description :

Solar panels (photovoltaic modules) aluminum frame

A. Solar module aluminum frame Size Description:

- 1) 17 * 17, 20 * 20, 23 * 17, 25 * 25, 28 * 25mm, etc., suitable for solar street lamps and other small solar power generation equipment;
- 2) 30 * 25, 35 * 30mm, suitable for 30-100W solar modules;
- 3) 35 * 35mm, suitable for 80-180W solar modules, length is generally 1580 * 808mm (the most common frame size);
- 4) 40 * 35mm, suitable for 120-200W solar modules, length is generally 1580 * 808mm;
- 5) 45 * 35mm, suitable for 180-250W solar modules, length is generally 1580 * 808 and 1650 * 992mm;
- 6) 50 * 35mm, suitable for 200-300W solar modules, length is generally 1650 * 992 and 1960 * 992mm;
- 7) Many other customized according to customer's special sizes, such as 40 * 28mm, 40 * 30mm, 42 * 35mm, 46 * 30mm, 46 * 35mm, 46 * 40mm, 46 * 48mm, 46 * 50mm, 46 * 60mm, 60 * 35mm and so on.

B. Two types:

- 1) 90 Angle (screw border)
- 2) 45 corner (Corner Borders)

C. Surface treatment:

- 1) Anodized (silver, bronze, black, gold, silver, other colors)
- 2) Electrophoresis
- 3) powder coating, PVDF, polishing, sand blasting

Standard: GB/T5237 - 2004, Q/320281PDW01-2008

Size: According to your design drawings, model

Note: 1. Various sizes for our existing solar frame, without open new mold.

2 aluminum frame is very popular in Europe.













3. We can follow your design drawings requirements.



Our Advantages!

1. 22 years' experiences of manufacturing .
2. STRONG R&D: Help customers finalize the design, strong tool design ability, excellent pressing and surface treatment technology.
3. Strict quality management: ISO Administration system.
4. 24 hours on-line communication. Professional, Patient, Flexible.
5. High capacity of manufacturing and wide range of products.
6. Be able to provide secondary fabricating.
7. Small order is accepted.
8. Be able to provide one-stop supply solution.
9. Multiple payment methods: TT, LC, DP, OA.

新图号 旧图号	简 图	线密度 kg/m	新图号 旧图号	简 图	线密度 kg/m
GT001 G701		0.987	GT007 G007		0.803
GT002 角码为GT001 G702		0.530	GT008 G008		0.633
GT003 G795		0.615	GT009 G009		0.494
GT004 G794		0.466	GT010 G010		0.496
GT005 G590		0.814	GT011 G011		0.388
GT006 G591		0.681	GT012 G012		0.290

新图号 旧图号	简 图	线密度 kg/m	新图号 旧图号	简 图	线密度 kg/m
GT013 G778		0.372	GT019 G599		0.665
GT014 G594		0.367	GT020 G846		0.400
GT015 G595		0.183	GT021 Z081		0.884
GT016 G596		0.248	GT022 Z082		1.228
GT017 G597		0.534	GT023 Z083		0.952
GT018 G598		0.339	GT024 Z084		1.073

线密度仅供参考，出货以实际称重为准！ **210**

新图号 旧图号	简图	线密度 kg/m	新图号 旧图号	简图	线密度 kg/m
GT025 角码为GT026		0.653	GT031		0.548
G895			G893		
GT026		0.732	GT032		0.279
G896			G894		
GT027 角码为GT026		0.424	GT033		1.711
G915			G913		
GT028 角码为GT026		0.524	GT034 角码为GT033		0.745
G916			G914		
GT029		1.300	GT035		0.398
G822			G222		
GT030 角码为GT029		0.567	GT036		0.754
G823			G224		

新图号 旧图号	简 图	线密度 kg/m	新图号 旧图号	简 图	线密度 kg/m
GT037 G229		0.172	GT052		0.728
GT038 G230		0.374	GT054 角码为GT052		0.509
GT039 G889		0.626	GT055 角码为GT052		0.537
GT040 G888		0.756	GT061		0.161
GT041 角码为GT026 G187		0.692	GT062		0.340
GT042 角码为GT026 G789		0.443	GT063		0.209

新图号	简图	线密度 kg/m
旧图号		
GT064		0.394
GT068		0.497
GT069		0.613
GT070		0.312
角码为 GT050		
GT071		0.687
GT072		0.378

新图号	简图	线密度 kg/m
旧图号		
GT076		0.698
角码为 GT050		
GT077A		0.848
GT078A		0.635
GT079		0.524
GT080		0.651
GT081		0.395

213 线密度仅供参考, 出货以实际磅重为准!

HD太阳能系列型材图 国家免检

新图号 旧图号	简 图	线密度 kg/m
GT082		0.245
GT083		0.267
GT084		0.519
GT085		0.646
GT086		0.674
GT087		0.655

新图号 旧图号	简 图	线密度 kg/m
GT088		0.677
GT089		0.558
GT091 角钢为 GT092		0.580
G791		
GT092		0.967
G792		
GT093 角钢为 GT094		0.832
GT094		1.519

线密度仅供参考, 出货以实际磅重为准! **214**

Applications:

- 1) Living house and home building.
- 2) Commercial building, factory, shopping mall, school, stadium etc.
- 3) Power station, field operation and some huge engineer construction.

Competitive Advantage:

In addition to high quality ,we at Hentec office offer customer complete service .Our aluminum solar frame comes with a 15 year warranty .Maintenance service is also available .



HENTEC Hentec Industry Co.,Ltd

+86-13861643436

aluminum@hentec.com.cn

aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421