HT

High Corrosion Resistance Solar Roof Mounting Systems Mid Clam / End Clamp / Rail / Hook / Block

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Application:
- Temper:
- Suface Treatment:
- Material:
- Alloy:
- Product Name:
- China CA, CE HENTEC rail splice buildings,commercial,industrial T4, T5, T6, T66 Mill Finished, Anodized, etc Aluminum 6063,6061,6005 Aluminum Curtain Wall Profile

> HENTEC



Product Specification

• Highlight:

solar roof mounting kits, solar panel roof mounts



More Images




Product Description

New Design High Corrosion Resistance Solar Roof Mounting Systems , Mid Clam / End Clamp / Rail / Hook / Block

Manufacturing	15 Years' Experience	Ease of Installation
experience in manufacturing Aluminum and steel components and works strictly under ISO 9001 manufacturing standards with Quality always at the forefront	At Solar Solutions, we believe we are well credentialed to be a voice of the industry. We are an integral component of the brilliance Group, with nearly 12years of service to Europe, America, South Africa which makes us the largest distribution and support network of this kind in the country.	products are carefully designed with fast installation always in mind. Time is money and with years of experience in dealing with solar installers we understands just how important it

Specification:

Туре:	Roof solar mounting Kit	
Installation site:	According to Roof Type	
Material:	Aluminum6063-T5;Steel	
Fasten material:	Aluminum	
Anticorrosive:	Hot-dip galvanized	
Survival Wind Speed:	< 60m/s	
Design Snow load:	Up to 1.4KN/ Square meters	
Solar panel type:	Framed or Frameless	
Panel Orientation:	Transverse or vertical	
Design Standard:	CE;IOS9001	
Quality warranty:	25 years	
Duration:	More than 20 years	
Delivery time:	7-15 days	
Package: Standard Packing		

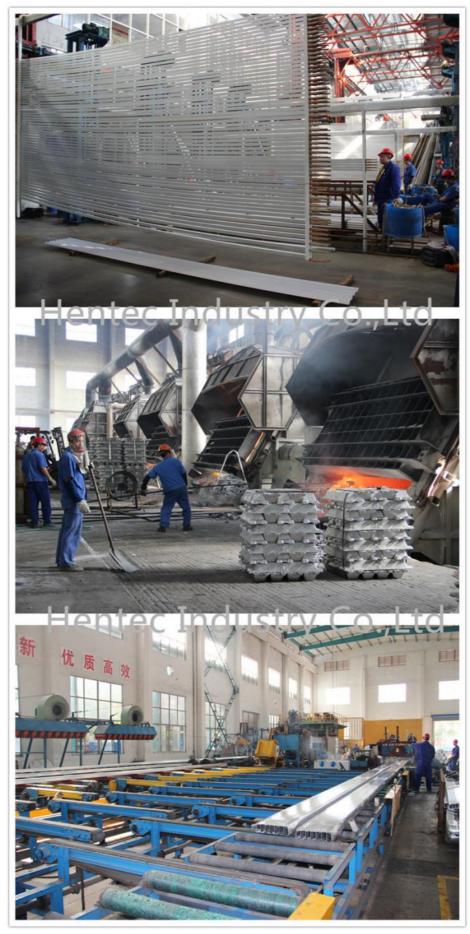

Competitive Advantage:

- Easy installation
 Wide application
 High quality solar clamps
 Fast Delivery
 Customized designed offer

FAQ For Saving Your Precious Time!

Q1:What's the thickness for anodizing?Can you do 15um?

A:Our normal thickness is about 10 um.Yes, we can do 15um and above.

Q2:What color you can do for powder coating?The thickness for powder coat?

A:We can do any color for powder coat as long as you can provide the color sample.Our normally powder coating thickness is 60-80um.

Q3:What color you can do for wood grain?

A:Our most popular colors are Western Red Cedar, Australia Cedar, Jarrah I, Jarrah II, Chestnut, Bush Cherry, Bush Wood, Western Wood, Snow Gum, etc.If you need any other colors, we can do according to the color samples you provide. Q4:How's the weather resistance for wood grain finish D1010?

A:(1).Powder:Akzo Noble Interpon D1010.

(2).Wood grain film:Italian Menphis.

(3).Standard complied:American AAMA Standard.2603

(4).UV test:1000 hours.

(5).Salt spraying test:1000 hours.

(6).Normal weather:10 years color guarantee.

Q5:What certification do you have?What's your standard?

A:We have ISO certification.Our standard is DIN, AAMA, AS/NZS, China GB.

Q6:What's the delivery time for samples and mass production?

A:(1).2-3 weeks to make the new moulds and make free samples.

(2).3-4 weeks after receipt of deposit and confirmation of the order.

Tag: solar panel roof mounting kits

solar panel roof mounting hardware

HENTEC Hentec Industry Co.,Ltd

+86-13861643436 aluminum@hentec.com.cn aluminumextrusion-profiles.com

Qinfeng Road No.555 Huashi Town Jiangyin Jiangsu China (mainland) 214421