




## Electrical Enclosure Industrial Aluminum Extruded Sections CNC Machining / Sand Blasting Anodizing

Our Product Introduction

for more products please visit us on [aluminumextrusion-profiles.com](http://aluminumextrusion-profiles.com)

### Basic Information

- Place of Origin: China
- Brand Name: Hentec
- Certification: SGS
- Minimum Order Quantity: 1 ton
- Packaging Details: Ep paper ,kraft ,pallet
- Delivery Time: 20days
- Payment Terms: T/T ,L/C
- Supply Ability: 100 000ton each month

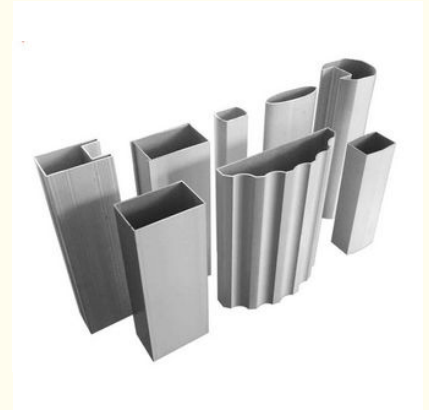

### Product Specification

- Product Name: Industrial Aluminium Profile
- Alloy: 6063,6061,6005
- Material: Aluminum
- Surface Treatment: Mill Finished,Anodized ,Electrophoretic Coated,Powder Spray Coated
- Deep Process: Milling, Drilling, Bending,Cutting
- Temper: T4, T5, T6 ,T66
- Highlight: **aluminium extrusion profiles, aluminium extruded profiles**



## Product Description

### Industrial Aluminum Extrusion Profile / Electrical Enclosure With CNC Machining / Sand Blasting Anodizing

Hentec Industry Co.,Ltd is one China Manufactory, professional at aluminum extrusion profiles, both semi and final products, such as LED aluminum bracket, aluminum door, aluminum window, aluminum curtain rod, aluminum guide rail, aluminum fencing and all kinds of industrial and building aluminum profile, square, round, flat, oval, angle, irregular and all types according to the customers' drawing.

#### Description:

1	Business type:	Real Big Manufacturer & Exporter with 22 years experience
2		Architecture Profile : GB 5237-2008
	Production Standard:	Industry Profile : GB/T6892-2008
3	Main products	Aluminum extrusion profiles for architectural & industrial, Different aluminum profile sections for different applications .  Aluminum Formwork for Building Construction.
4	Main Product Finishes	Mill finish, powder coating, anodized color, wooden pattern, Polyvinylidene Fluoride (PVDF)-Coating, Machine Polishing, Chemical Polishing, Mirror Polishing, Brushing Finish, thermal insulation of barrier strip, thermal insulation of filling-polyurethane
5	Price:	Based on Guangdong Nanhai Lingtong Aluminium Ingot price + different finishes processing Fee + local cost
6	Payment term:	T/T, L/C at sight
7	Specification:	A. Alloy: 6063, 6060, 6061, 6005 etc B. State: T5/T6 C. Length: 1m-13 m ( polishing : 2.5 m ) D. Normal Anodizing thickness: 8-12 micro E. Normal powder coating thickness: 60-100 micro F. Tensile strength: $\geq 16$ mpa G. Yield strength: $\geq 110$ mpa H. Extensibility: $\geq 8\%$  I. Hardness(HW): $\geq 8$
	Packing:	Kraft paper, EPE Fram, Shrink film, Carton Box, Wooden box etc, Customized package is available.
9	MOQ:	1X20 FCL ,Each profile not less than 500 kgs. Each color not less than 2 tons.
10	Sample time	10-15 days after drawing confirmed and mold cost paid.
11	Delivery time:	35 days after deposit received.
12	Port	Shanghai Port

#### Order, payment, terms, shipment

- 1, Minimum order: 500kg per trial order 1 piece of sample free of charge provided by approval and kept for future mass production.
- 2, Sample Lead Time: 25 working days (15 days for making the tool and 10 days making the samples. Before sending the samples to customer, samples should pass strict test in our lab. ) Production Lead time: it depends on customers' order quantity ( 30 working days after deposit).
- 3, Payment: (Can negotiate with customers, our usual practices are as follow)
- 4, Tooling: 100% prepaid by T/T.
- 5, Parts: 30% upon order confirmation and balance before delivery by T/T

#### Applications:

Aluminum profile used in cars, trains machinery ,electronics, medical and other industrial filed . In terms of hardware, machinery, electromechanical parts, solar PV products, aluminum frames are adopt as important auxiliary materials. We also have aluminum profiles for radiators, fitness machinery, buildings, lighting instrument, windpipes, oil pipelines, for instance.

#### Competitive Advantage:

1. good quality aluminium profile with economic price
2. 15-year manufacturing experience
3. ISO9000
4. ODM or OEM



#### FAQ For Saving Your Precious Time!

Q1: What's the thickness for anodizing? Can you do 15um?

A: Our normal thickness is about 10 um. Yes, we can do 15um and above.

Q2: What color you can do for powder coating? The thickness for powder coat?

A: We can do any color for powder coat as long as you can provide the color sample. Our normally powder coating thickness is 60-80um.

Q3: What color you can do for wood grain?

A: Our most popular colors are Western Red Cedar, Australia Cedar, Jarrah I, Jarrah II, Chestnut, Bush Cherry, Bush Wood, Western Wood, Snow Gum, etc. If you need any other colors, we can do according to the color samples you provide.

Q4: How's the weather resistance for wood grain finish D1010?

A: (1). Powder: Akzo Noble Interpon D1010.

(2). Wood grain film: Italian Memphis.

(3). Standard complied: American AAMA Standard.2603

(4). UV test: 1000 hours.

(5). Salt spraying test: 1000 hours.

(6). Normal weather: 10 years color guarantee.

Q5: What certification do you have? What's your standard?

A: We have ISO certification. Our standard is DIN, AAMA, AS/NZS, China GB.

Q6: What's the delivery time for samples and mass production?

A: (1). 2-3 weeks to make the new moulds and make free samples.

(2). 3-4 weeks after receipt of deposit and confirmation of the order.